

Four Block Shapes - Multiple Designs




Paver Installation

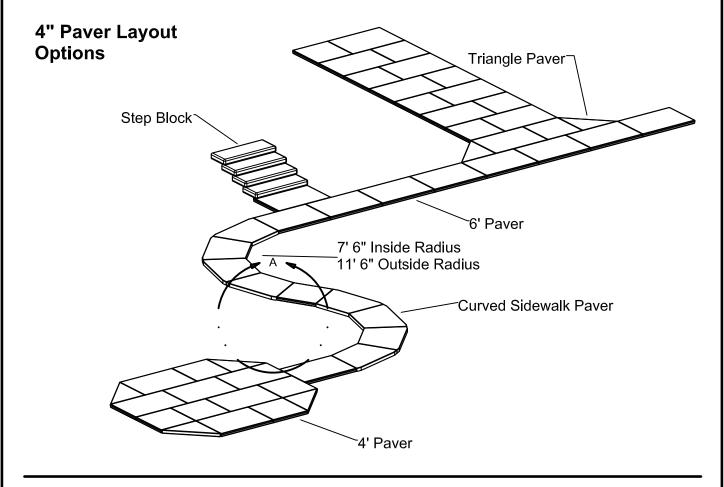



4" footing bearing material shall be gravel compacted to 95% of standard proctor (or as specified by engineer).



1" to 1 1/2" compacted sand screeded smooth for bedding pavers.

DRAWN BY:	JRJ	TITLE:	
APPROVED BY:	JRJ		Paver Slab Layout Details
DATE:	06-22-2015		•
SHEET:	1 of 1	FILE:	2 Paver Slab Layout Details 062215.dwg

